



MD-30L850B



Reliable Sample Storage

High temperature uniformity;
Imported world-famous components.

Double Door Design

Four independent inner door design reduce heat loss.

Multi-level Alarms

High,low temperature,sensor error,power failure,
high ambient alarm,door open alarm.

Fast Cooling

High efficiency cooling fans and compressors.

■ Structure Features

1 Multi-layer Sealing Structure

Multi-layers gaskets provide a tight seal between the inner doors and outer door, reducing heat exchange and retaining the inner temperature better when there is power failure.

2 VIP PLUS Design

Provides up to 30% more storage capacity than a conventionally insulated freezer, without increasing the footprint. A glass fibre core provides advanced thermal properties.

3 USB Port

Enables users to download historical temperature data for compliance/auditing purposes.

4 LED Display

Alarm functions include high, low temperature, sensor error, power failure, high ambient alarm, door open alarm etc.



5 Lever Handle Design

Ingenious handle design helps you to open and close door easier. Lockable handle safeguards your precious samples. Padlock can also be added for extra safety.

6 Relief Ports

It allows users to re-open the main door quickly when entering ,rust-proof, freeze-free.

7 Narrow Door Design

The freezer can pass through an 750mm wide door when the door is open.

Application, Rating, & Electrical Data

Application	Biomedical freezer
Storage Volume (L/Cu.Ft)	850/30.01
Temperature Range	-10°C ~ -30°C
Default Set Point	-30°C
Power	220~240V~/50Hz/60Hz
Current	3.3A
Power Cord Length	1.7m
Certification	CE
Door type	Solid door
Application Environment	Non-corrosive, non-flammable, non-explosive
Ambient Operating Temperature	10°C~32°C

Refrigeration

Refrigeration System	Direct cooling
Compressor	Hermetic, Inverter
Condenser Type	Built in + micro channel condenser
Expansion Device	Capillary tube
Evaporator Type	Shelf evaporator
Defrost Method	Manual defrost
Refrigerant	R290

Controller / Configuration Settings

Display screen	LED
Controller Type	Microprocessor
Security	Lockable door, protected settings
Control Sensor	PT1000
Communication Ports	USB, Remote alarm contacts
Power Failure Alarm	Yes
High/Low Alarms	Yes, fully adjustable
Door Ajar Alarm	Yes
Download	Yes, via USB, PDF
Temperature Log	Yes, download via USB

Performance Characteristics (normal operating conditions)

Uniformity (°C)	≤3°C
Energy consumption (kWh/day)	2.9
Noise emission (dB)	65
Pull-down time to -30°C (min)	129

Typical Temperature Map

Fre	test 1	test 2	test 3	test 4	test 5	test 6	test 7	test 8	test 9
Avg	-31.20	-31.10	-31.00	-30.90	-39.32	-30.90	-30.80	-30.90	-30.90
Max	-29.50	-29.40	-29.30	-29.20	-29.10	-29.10	-29.20	-29.30	-29.50
Min	-32.20	-32.10	-32.00	-32.00	-31.90	-31.90	-31.80	-31.90	-31.90

Midea Biomedical,Trademarks are the property of their respective owners. Drawings are not for engineering use, and specifications may change. Not all products are available in all countries, so please check with your local sales representative for details.


Midea Biomedical reserves right to interpret the data.

Dimensions and Construction

Interior (w*d*h)	885*720*1310 mm
Exterior (w*d*h)	1175*995*1980 mm
Access Port	2 Access Port- for external monitoring probe(s) (25 mm diameter)
Racks (tiers*columns)	5*5(24)
Wheels	4 Swivel Casters + 2 Leveling Feet
Net Weight	239 kg
Gross Weight	308 kg

All performance data from 850L biomedical freezer, 25 ambient, -30°C

Uniformity

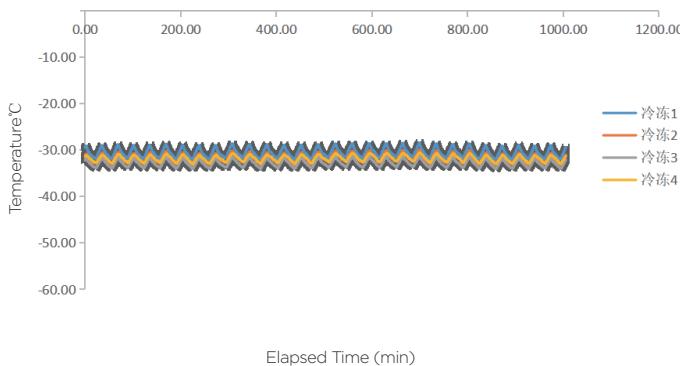

Cooling Speed

